


F.A. PROJECT NO.

NOTES

ASSUMED LIVE LOAD -----MS18 OR ALTERNATE LOADING.
DESIGN FILL-----
FOR OTHER DESIGN DATA AND NOTES SEE STANDARD NOTE SHEET.
76mm Ø WEEP HOLES INDICATED TO BE IN ACCORDANCE WITH THE SPECIFICATIONS.
CONCRETE IN CULVERTS TO BE POURED IN THE FOLLOWING ORDER:
1. WING FOOTINGS AND FLOOR SLAB INCLUDING 100mm OF ALL VERTICAL WALLS.
2. THE REMAINING PORTIONS OF THE WALLS AND WINGS FULL HEIGHT FOLLOWED BY ROOF SLAB AND HEADWALLS.
THE RESIDENT ENGINEER SHALL CHECK THE LENGTH OF CULVERT BEFORE STAKING IT OUT TO MAKE CERTAIN THAT IT WILL PROPERLY TAKE CARE OF THE FILL.
THIS BARREL STANDARD TO BE USED ONLY ON CULVERTS ON 105° SKEW AND TO BE USED WITH STANDARD WING SHEET WITH THE SAME SKEW AND VERTICAL CLEARANCE.
DIMENSIONS FOR WING LAYOUT AS WELL AS ADDITIONAL REINFORCING STEEL EMBEDDED IN BARREL ARE SHOWN ON WING SHEET.
TRANSVERSE CONSTRUCTION JOINTS SHALL BE USED IN THE BARREL, SPACED TO LIMIT THE POURS TO A MAXIMUM OF 21.0m. LOCATION OF JOINTS SHALL BE SUBJECT TO APPROVAL OF THE ENGINEER.
AT THE CONTRACTOR'S OPTION, HE MAY SPLICE THE VERTICAL REINFORCING STEEL IN THE INTERIOR FACE OF EXTERIOR WALL ABOVE LOWER WALL CONSTRUCTION JOINT. THE SPLICE LENGTH SHALL BE AS PROVIDED IN THE SPLICE LENGTH CHART SHOWN ON THE PLANS. EXTRA WEIGHT OF STEEL DUE TO THE SPLICES SHALL BE PAID FOR BY THE CONTRACTOR.
AT THE CONTRACTOR'S OPTION HE MAY SUBMIT, TO THE ENGINEER FOR APPROVAL, DESIGN AND DETAIL DRAWINGS FOR A PRECAST REINFORCED CONCRETE BOX CULVERT IN LIEU OF THE CAST-IN-PLACE CULVERT SHOWN ON THE PLANS. THE DESIGN SHALL PROVIDE THE SAME SIZE AND NUMBER OF BARRELS AS USED ON THE CAST-IN-PLACE DESIGN. FOR OPTIONAL PRECAST REINFORCED CONCRETE BOX CULVERT, SEE SPECIAL PROVISIONS.
FOR SUBMITTAL OF WORKING DRAWINGS, SEE SPECIAL PROVISIONS.

TOTAL STRUCTURE QUANTITIES	
CLASS A CONCRETE	
BARREL @ _____ m ³ / m _____ m ³	
WINGS ETC. _____ m ³	
TOTAL _____ m ³	
REINFORCING STEEL	
BARREL _____ kg	
WINGS ETC. _____ kg	
TOTAL _____ kg	
CULVERT EXCAVATION ----- LUMP SUM	
FOUNDATION COND. MAT'L ---- METRIC TONS	



BAR TYPE
DIMENSIONS ARE OUT TO OUT

PROJECT NO. _____
_____ COUNTY
STATION: _____
SHEET 1 OF 2

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH
BARREL STANDARD
SINGLE m X m
CONCRETE BOX CULVERT
60° SKEW


REVISIONS						SHEET NO.
NO.	BY	DATE	NO.	BY	DATE	
1			3			TOTAL SHEETS
2			4			

STD. No. CB160SM


LOCATION SKETCH

PROFILE ALONG C CULVERT


ASSEMBLED BY : _____	DATE : _____
CHECKED BY : _____	DATE : _____
DRAWN BY : EEM 6/97	-----
CHECKED BY : ARB 7/97	-----

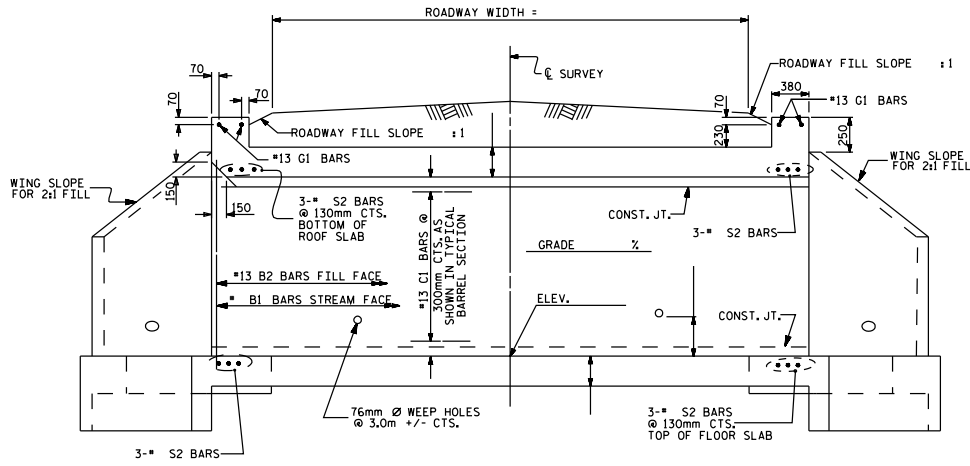

CULVERT SECTION NORMAL TO ROADWAY

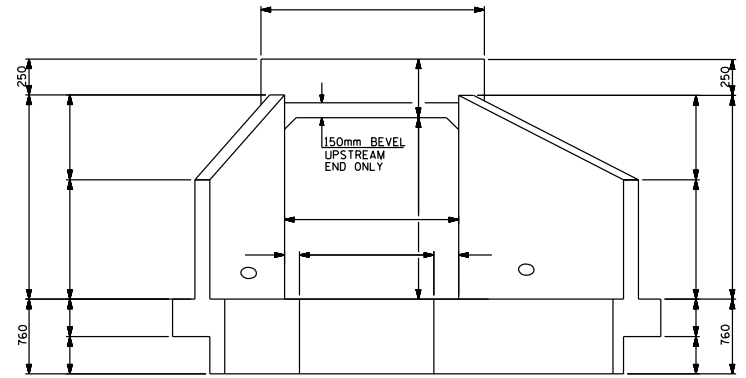

END ELEVATION NORMAL TO SKEW

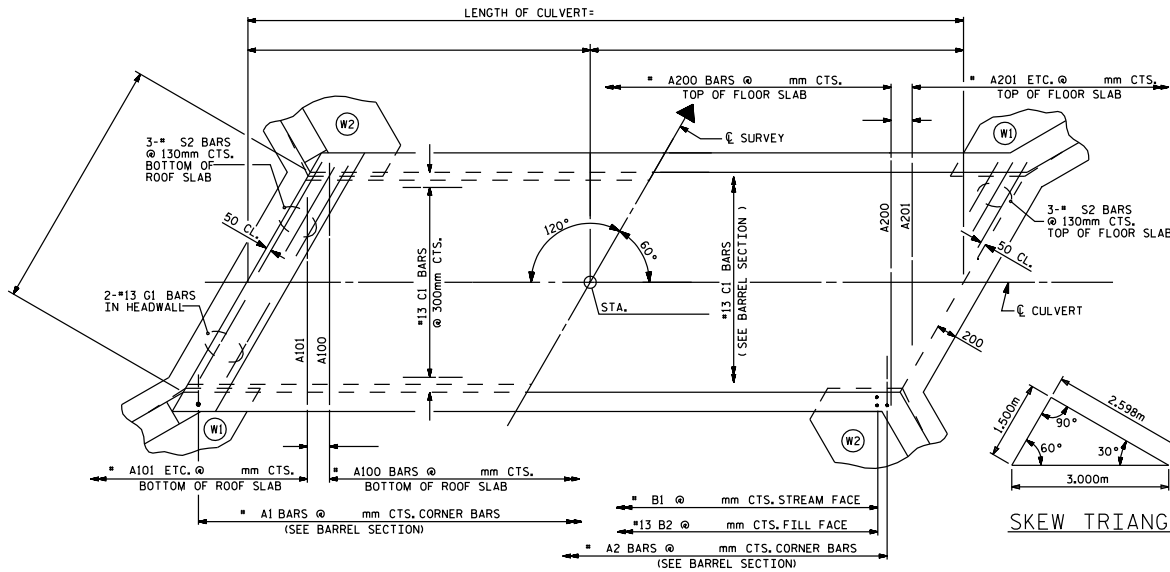

PART PLAN - ROOF SLAB

PART PLAN - FLOOR SLAB

DETAIL
CONNECTION OF WING FOOTING
AND FLOOR SLAB WHEN SLAB
IS THICKER THAN FOOTING

SKEW TRIANGLE



PROJECT NO. _____
COUNTY _____
STATION: _____
SHEET 2 OF 2

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH
BARREL STANDARD
SINGLE m X m
CONCRETE BOX CULVERT
60° SKEW

ASSEMBLED BY : _____ DATE : _____
CHECKED BY : _____ DATE : _____
DRAWN BY : EEM 6/97
CHECKED BY : ARB 7/97

REVISIONS						SHEET NO.
NO.	BY	DATE	NO.	BY	DATE	
1			3			TOTAL SHEETS
2			4			

STD. NO. CB160SM